



高精度 High Precision
长寿命 Exceptional Endurance
低噪音 Low Noise
高效率 High Efficiency

技术数据 Electrical Specifications

型号 Series Model	电流 Rated Current (A)	电阻 Phase Resistance (Ω)	电感 Phase Inductance (mH)	引线数 Lead Wire (No.)	静力矩 Holding Torque (N.cm)	机身長L Motor Length L (mm)	步距角 Step Angle (°)
17HS3401	1.3	2.4	3.5	4	28	34	1.8
17HS4401	1.7	1.5	2.8		40	40	
17HS8401		1.8	3.2		50	48	
17HS8630	0.4	30	28	6	34		

丝杆说明 Screw Specification


编码 Code	直径(D) Diameter ΦD	步长 Linear travel per step	导程 Step
631	Φ6.35	0.0079	1.59
632		0.0158	3.17
634		0.0315	6.35
081	Φ8	0.01	2
082		0.02	4
084		0.04	8

出轴长度可根据客户要求定制
The shaft length can be custom-made

*以上仅为代表性产品, 派生产品可根据客户要求制作, 选型时请与我司联系


*Note: We can manufacture products according to customer's requirements, please contact us when you choose the motor type.

接线图 Wiring Diagram

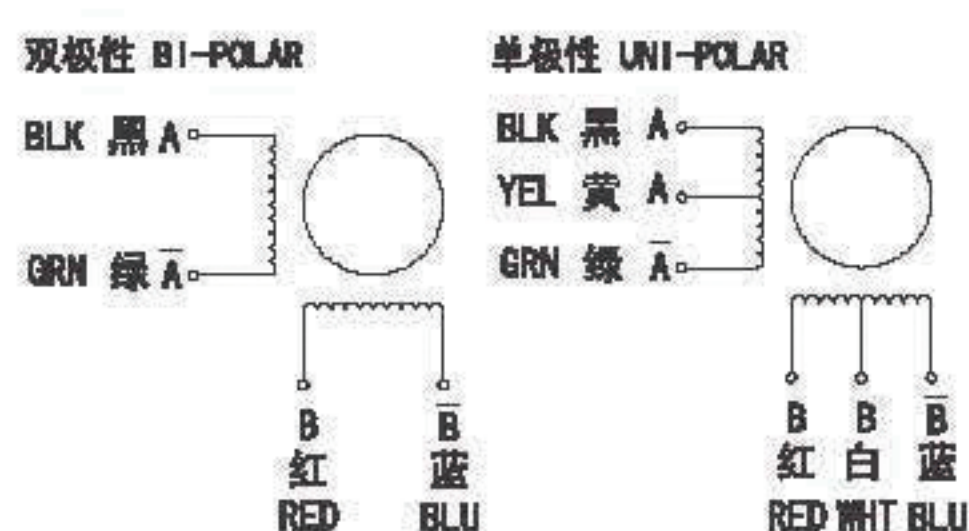


外形图 Dimensions(单位Unit: mm)

外部驱动式 External

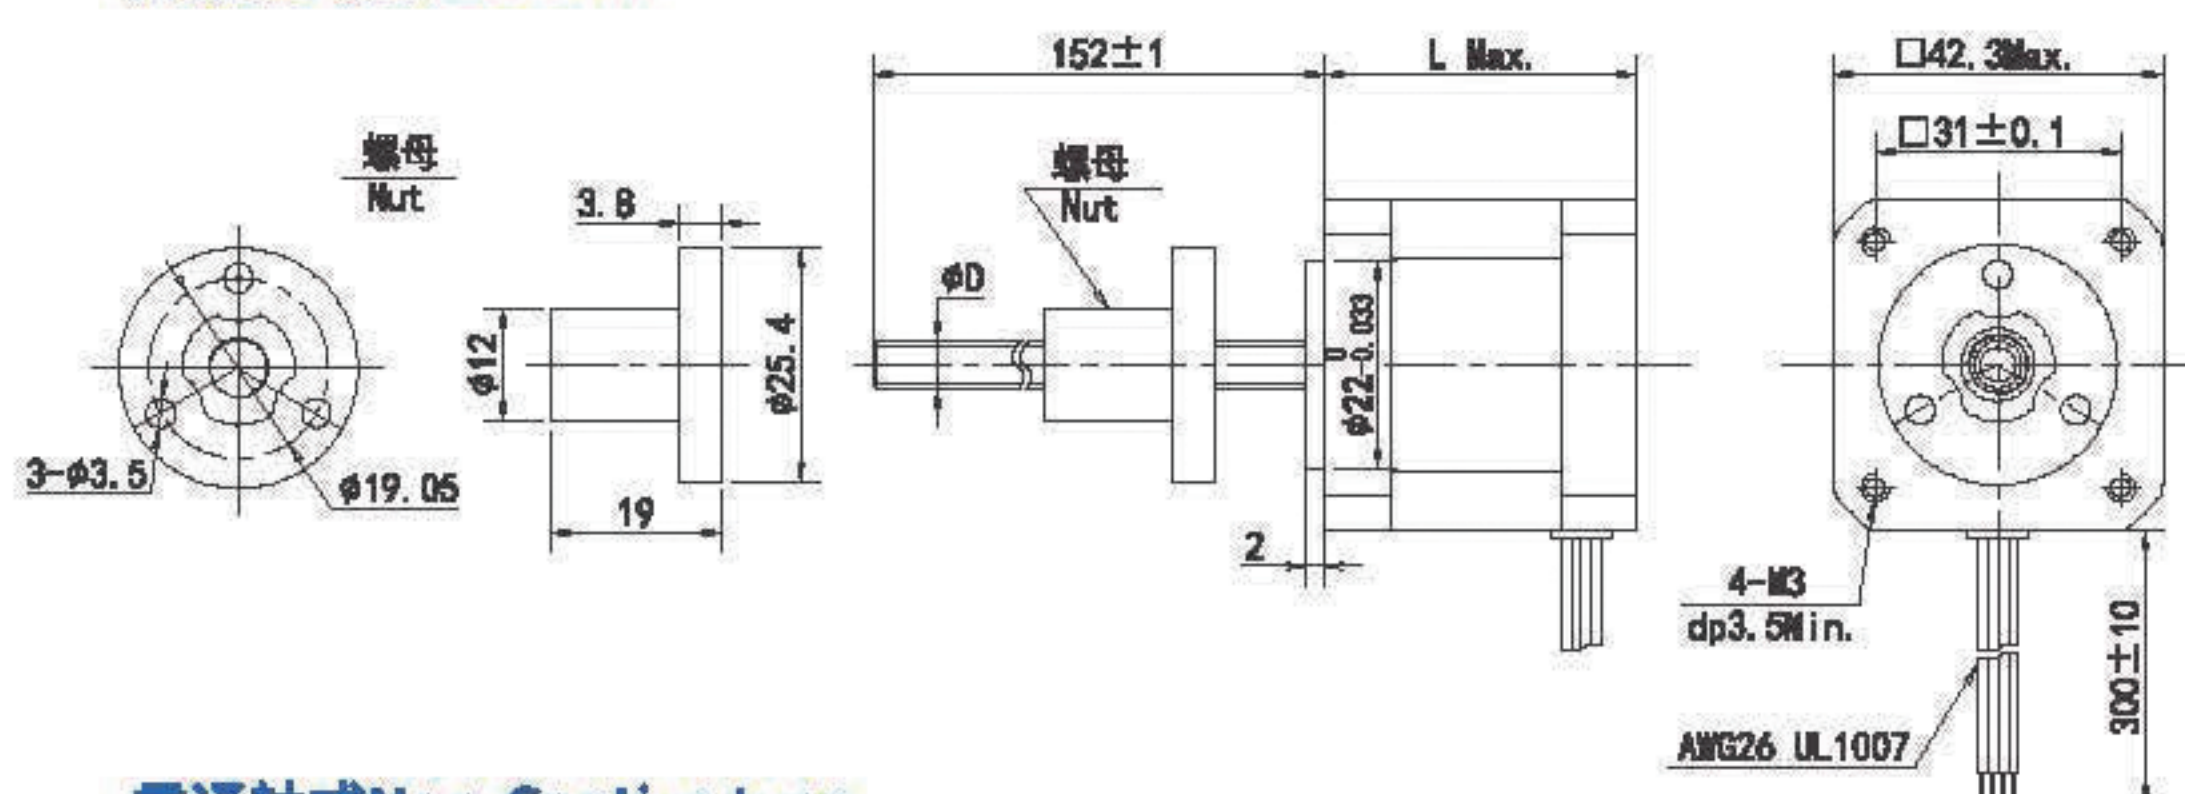

贯通轴式 Non-Captive type

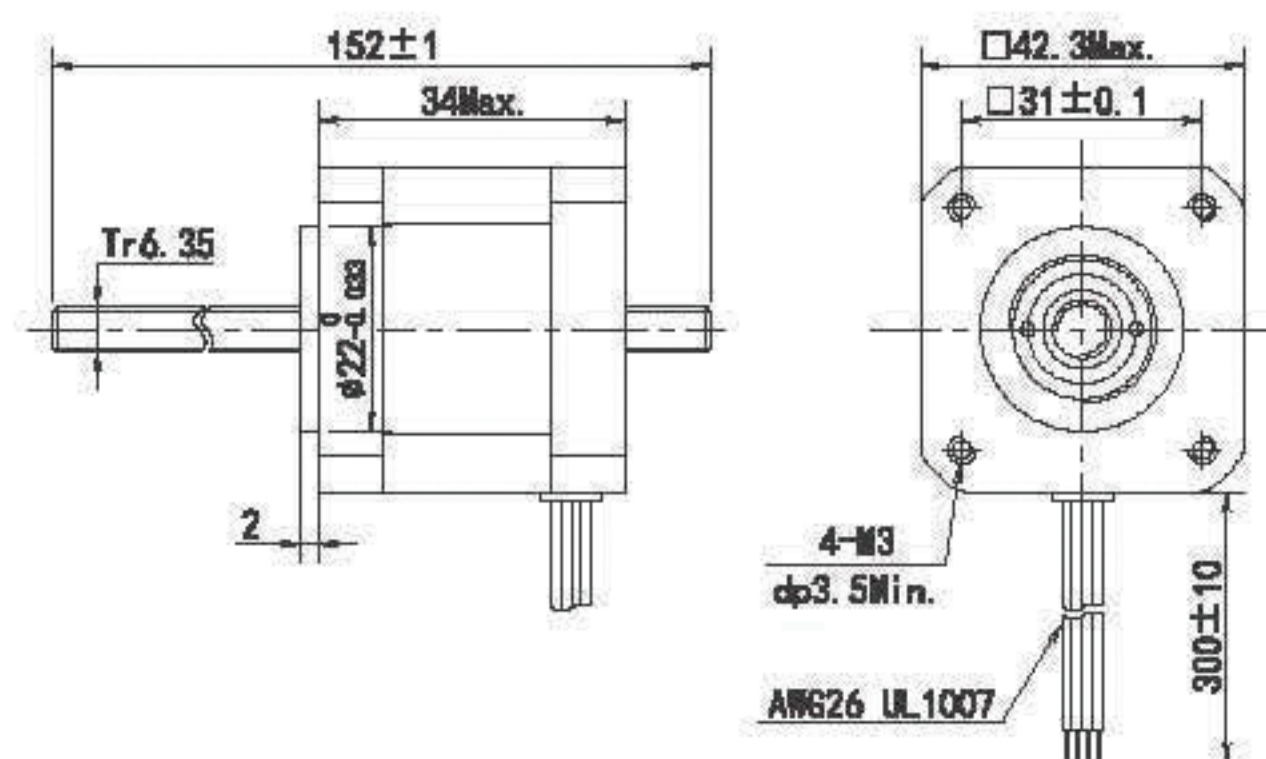

动态推力曲线 Dynamic Thrust Curve

驱动方式: 整步 Drive Mode: Full Step 编码: 631, 632, 634, 801, 804 Code: 631, 632, 634, 801, 804

