

NEMA17(□42mm)2相1.8°-17SSM Series




- 低振动 Low vibration
- 低噪音 Low noise
- 低发热 Low fever
- 高效率 High efficiency
- 高响应 High response
- 高精度 High precision
- 大力矩 High torque

■ 技术数据 Electrical Specifications

型号 Series Model	电流 Rated Current (A)	电阻 Phase Resistance (Ω)	电感 Phase Inductance (mH)	引线数 Lead Wire (No.)	静力矩 Holding Torque (N.cm)	机身长L Motor Length L (mm)	转动惯量 Rotor Inertia (g.cm ²)	重量 Motor Weight (g)	步距角 Step Angle (°)
17SSM3403EG	2.3	0.7	2.3	4	30	37	35	170	1.8
17SSM8403EG	2.3	1.0	1.9		50	51	77	420	
17SSM6403EG	2.3	1.4	3.1		80	67	115	530	
编码器分辨率 (P/R) Encoder Resolution		2500			长线驱动输出 Line Driver Output		3-channel:A+A-B+B-Z+Z-		

*以上仅为代表性产品, 派生产品可根据客户要求制作 *Note: We can manufacture products according to customer's requirements.

■ 外形图 Dimensions(单位Unit: mm)

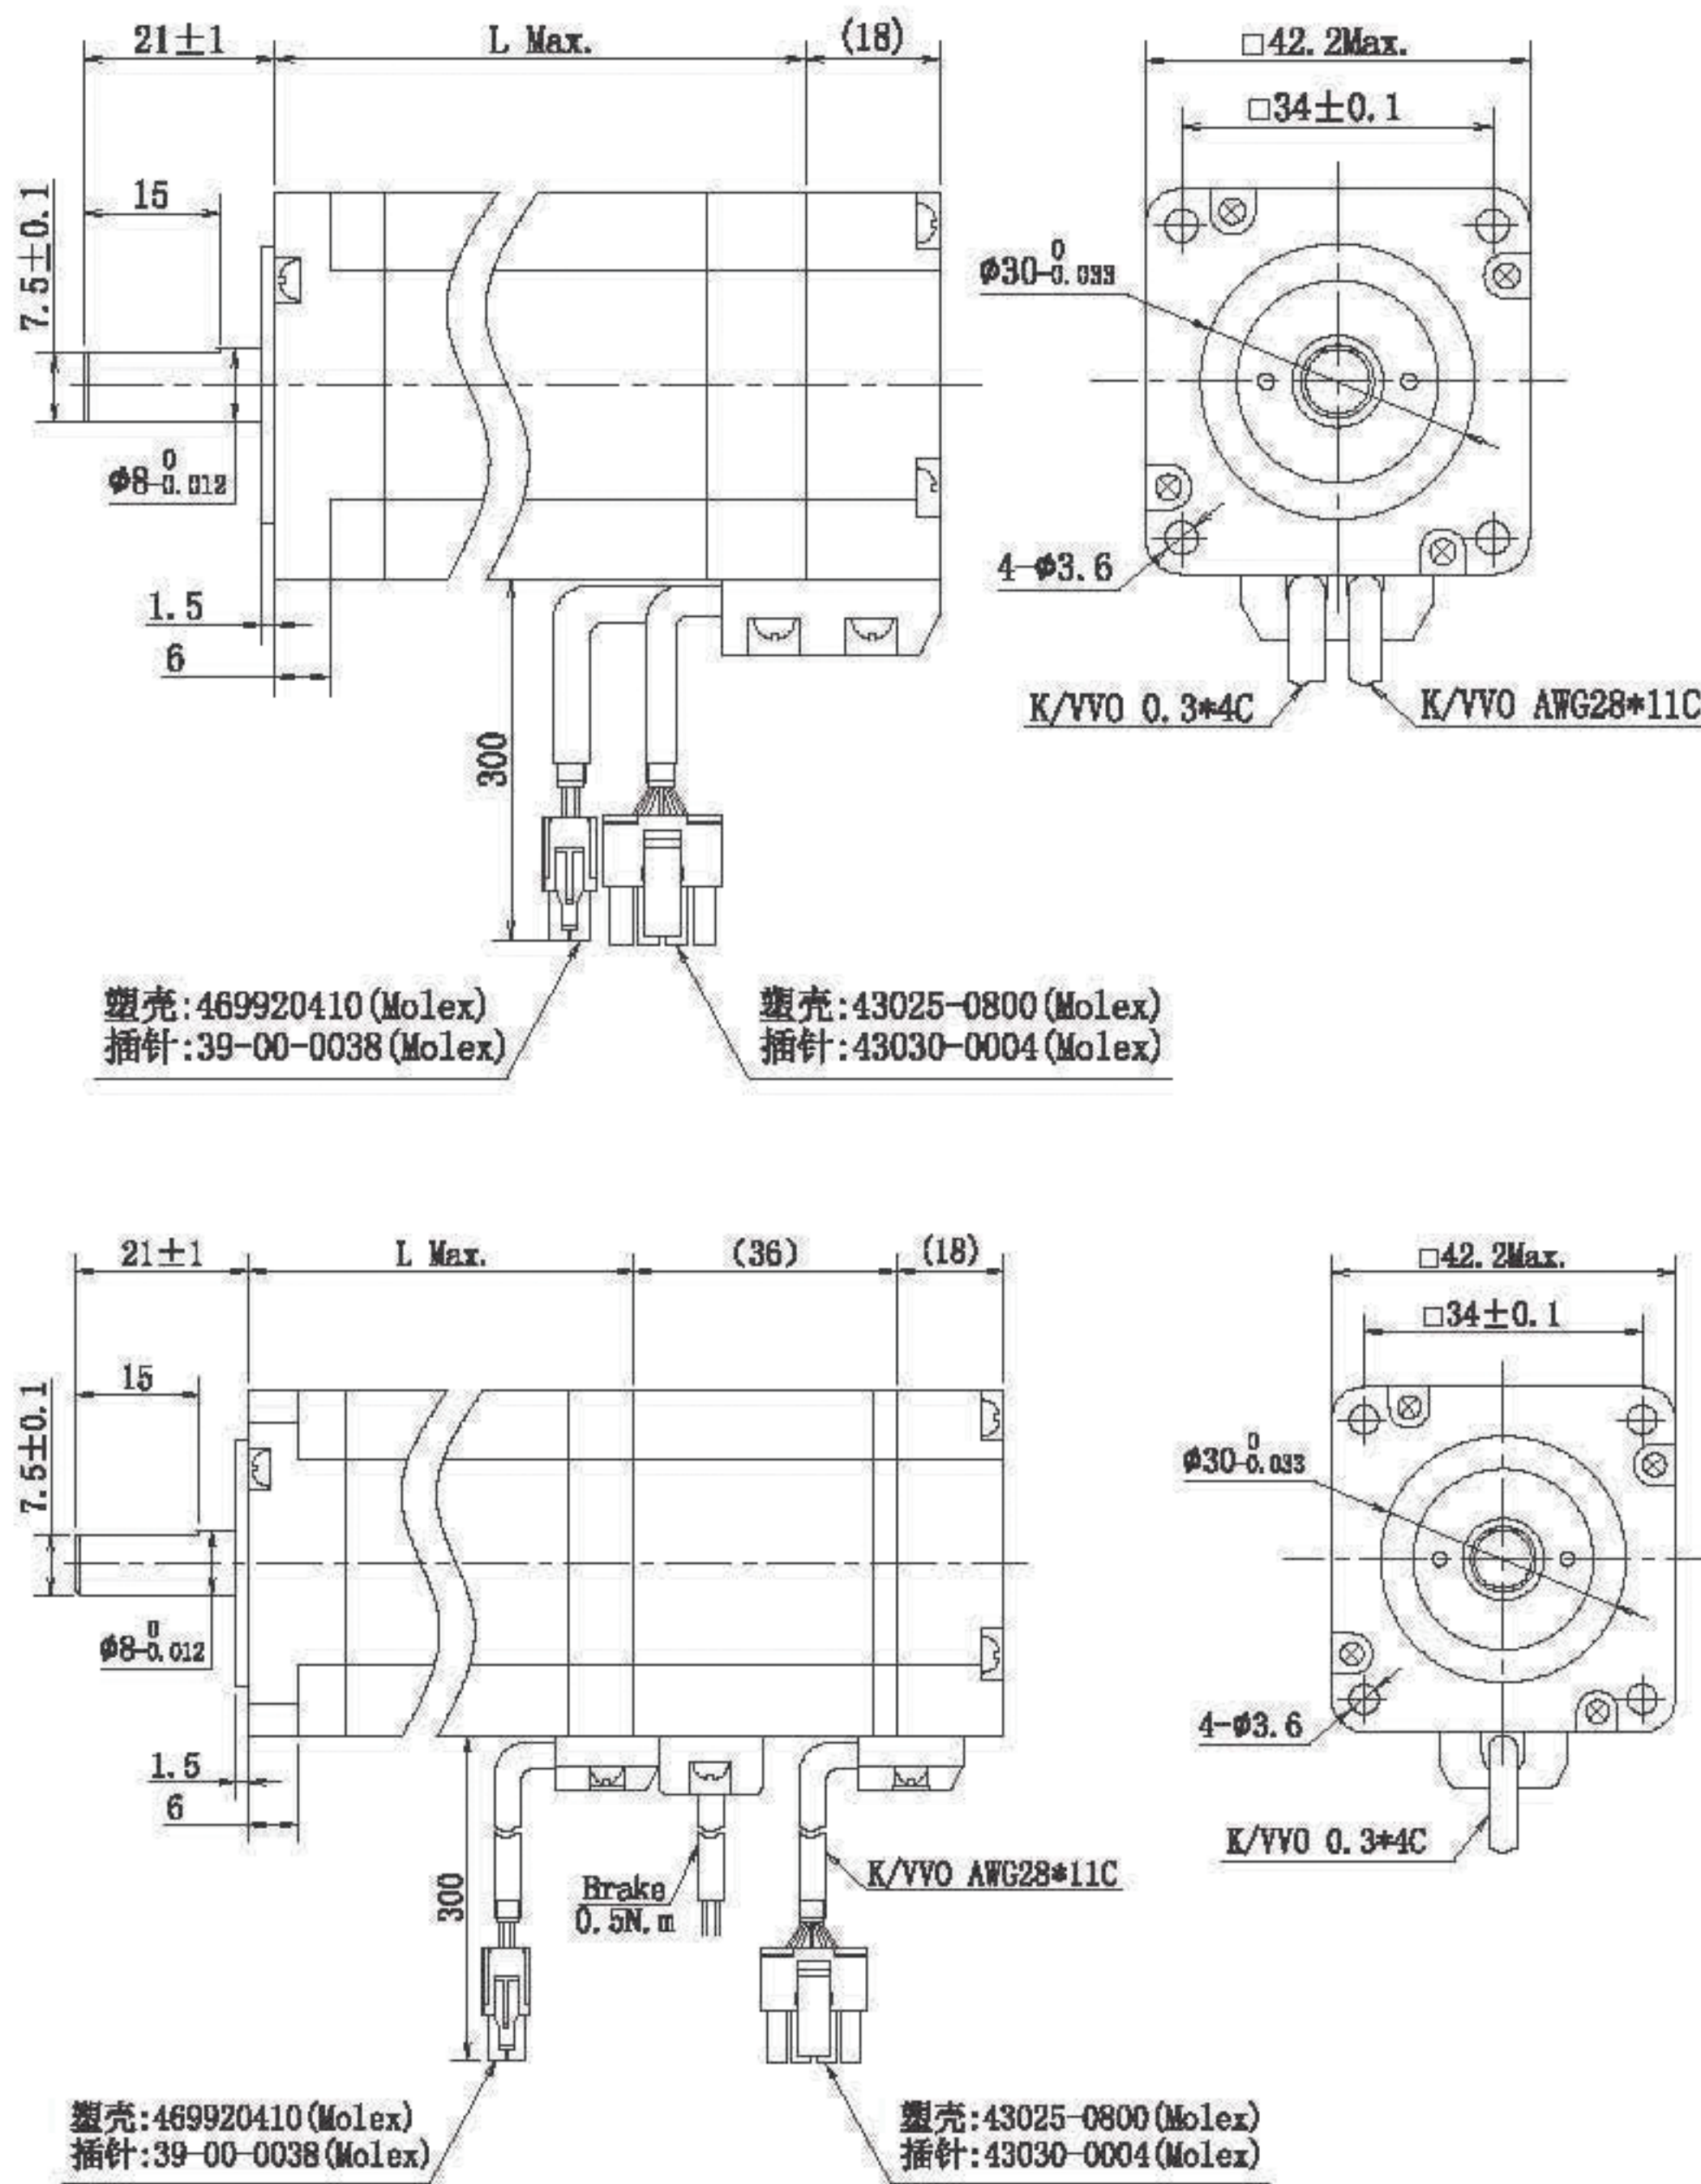

加刹车 ▲